


HIGH PERFORMANCE VpCI PACKAGING

Eco-Corr[®] Biodegradable VpCI[™] Film

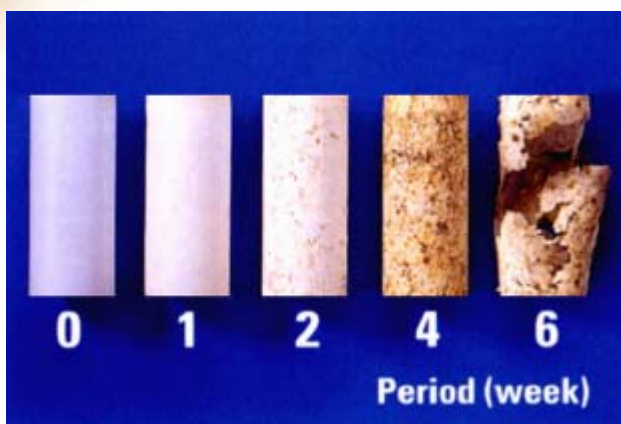

PRODUCT DESCRIPTION

Eco-Corr[®] is a DIN V 54 900 and BPS Certified 100% biodegradable and compostable film utilizing Cortec's patented VpCI[™] technology. In addition to offering 100% biodegradability, 100% compostability and VpCI[™] technology, Eco-Corr[®] provides better tensile strength, tear strength and ultimate elongation than low density polyethylene films. Eco-Corr[®] is also heat and water stable and does not disintegrate or break apart while in use.

Eco-Corr[®] provides contact, barrier and Vapor phase Corrosion Inhibitor (VpCI[™]) protection for up to two years depending on storage conditions. Once exposed to soil or compost conditions, Eco-Corr[®] will disintegrate rapidly (within weeks) and completely without contaminating the soil.

TYPICAL PROPERTIES of blown film, 2 mils (50 microns)

Property	Test method	Unit	Value	
			Eco-Corr	LDPE
Melting point	DSC	°C	110-115	111
Transparency	ASTM D-1003	%	82	89
Tensile strength (MD/CD)	ISO 527	N/mm ²	32/36	26/20
Ultimate elongation (MD/CD)	ISO 527	%	580/820	300/600
Failure energy (Dyna-Test)	DIN 53373	J/mm	14.3	5.5
Permeation rates: oxygen	DIN 53380	Cm ³ /m ² d*bar	1600	2900



FEATURES

- The first and only 100% biodegradable, 100% compostable packaging film that provides contact, barrier and vapor corrosion inhibition
- Provides multimetal corrosion inhibitor protection
- Extremely elastic
- Complete replacement for non-degradable and inferior blend films
- Compostable Testing under DIN V 54 900
- Plant Growth Testing under RAL GZ 251
- Ground Water Testing under DIN 38412 Part 30

APPLICATIONS

Metal parts packaged in Eco-Corr[®] receive continuous protection against salt, excessive humidity, condensation, moisture, aggressive industrial atmosphere and dissimilar metal corrosion. The Vapor phase Corrosion Inhibitors vaporize and then condense on all metal surfaces in the enclosed package. VpCI[™] reaches every area of your part, protecting its exterior as well as hard to reach interior surfaces. You get complete product protection during storage as well as during domestic and overseas shipments, virtually eliminating any rust claims.

Once the film is no longer needed, Eco-Corr® can be composted and will degrade into carbon dioxide and water within weeks, certified under BPS guidelines.

SHELF LIFE

For shipping and storage applications, Eco-Corr® is a great alternative to conventional polyethylene films. Eco-Corr® has a shelf life of up to two years, when sealed in original packaging.

Once removed and put to use, Eco-Corr® will remain effective with regard to mechanical strength until film is placed in contact with material containing microorganisms, such as certain types of waste, soil, and compost. Under these conditions, 100% disintegration will occur within a few weeks with no residual contamination of the soil, certified under RAL GZ 251 and DIN V 54 900.

PACKAGING

Eco-Corr® is available in standard length 36" (91.4cm) and 48" (122 cm) rolls as well as a wide variety of custom sizes and forms. Custom products include single wound sheeting, double wound sheeting, U-sheets, M-sheets, center folds, gusset tubes, converted bags made from these types of film and perforated or bag-on-a-roll products.

FOR INDUSTRIAL USE ONLY

KEEP OUT OF REACH OF CHILDREN

KEEP CONTAINER TIGHTLY CLOSED

NOT FOR INTERNAL CONSUMPTION

CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
Internet <http://www.CortecVpCI.com>

printed on recycled paper 10% post consumer
Revised 9/9/02. ©Cortec Corporation 2002. All rights reserved. Supersedes: 5/30/02.
Cortec®, Eco-Corr® and VpCI™ are trademarks of Cortec Corporation.

Distributed by:



OTiK Sp. z o.o.
ul. Hutnicza 4
81-061 Gdynia
tel.: 58 6230498
fax: 58 6230496
otik@use.pl
www.inhibitory.use.pl



Certificate No.70781

Certificate No.81867