




SURFACE PREPARATION PRODUCTS

VpCl[®]-426 Gel

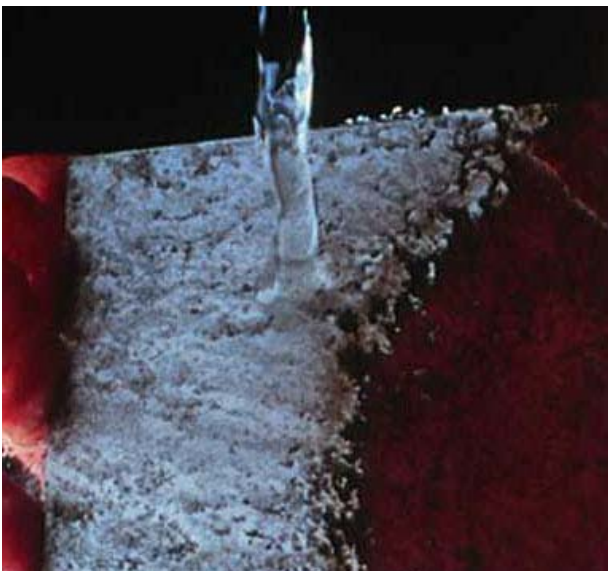

PRODUCT DESCRIPTION

VpCl[®]-426 Gel removes corrosion, scale and naturally occurring oxides from iron, carbon and stainless steel, copper, aluminum, magnesium and their alloys.

VpCl[®]-426 Gel stays in place on vertical and difficult to treat surfaces where corrosion is heavy, allowing extra time for VpCl[®]-426 Gel to remove corrosion from the metal surface.

VpCl[®]-426 Gel not only removes corrosion and scale, but also brightens aluminum and copper. VpCl[®]-426 Gel is safe enough to be used for household tasks.

TYPICAL USES

- Removes corrosion from ferrous metals
- Preparation of aluminum surfaces before anodizing, painting and electroplating
- Magnesium and magnesium alloys
- Oxide removal of brass, bronze, copper and zinc
- Brightener
- Overnight cleaning

- Removes scale build-up from bathroom tubs, showers and pipes
- Household corrosion removal needs

ADVANTAGES

- Very effective on carbon steel and stainless steel to dissolve rust, scale and oxide deposits
- Reduced toxicity and costs
- Increased performance over equivalent products
- Can be used in areas that can not be sandblasted or cleaned with power tools
- User friendly, non-toxic and nitrite-free
- Safe to use for household tasks

APPLICATION

Use* on mil scale, overnight cleaning and vertical/overhanging areas. Once corrosion has been removed it is advised to use Cortec[®] VpCl[®]-414 (1:5 and 1:10 dilutions) to rinse away any residue and to prevent the metal surface from flash rusting.

*Time to remove problem areas will vary with temperatures and substrate.

PHYSICAL PROPERTIES

Appearance	Clear gel
Density	8.7-9.0 lb/gal (1.04-1.08 kg/l)
Non-volatile Content	25-30%

PACKAGING

VpCl[®]-426 Gel is available in 5 gallon (19 liter) pails and 55 gallon (208 liter) drums. The minimum storage temperature is 32°F (0°C). The maximum storage temperature is 100°F (38°C).

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT MATERIAL SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.

BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE, AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



4119 White Bear Parkway, St. Paul, MN 55110 USA
 Phone (651) 429-1100, Fax (651) 429-1122
 Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
 Internet <http://www.cortecvci.com>

Distributed by:



OTiK Sp. z o.o.
 ul. Hutnicza 4
 81-061 Gdynia
 tel.: 58 6230498
 fax: 58 6230496
otik@use.pl
www.inhibitory.use.pl



Certificate No.70781

Certificate No.81867

printed on recycled paper 10% post consumer

Revised 2/28/03. Cortec Corporation 2000-2003. All rights reserved. Supersedes: 10/6/00. VpCI® is a trademark of Cortec Corporation.